



The CRAY EL92 desktide computer system delivers CRAY Y-MP and CRAY C90 compatibility to an office environment at a low price point. With up to two processors and 512 Mbytes (64 Mwords) of central memory, the CRAY EL92 system offers a clear upgrade path to large-scale parallel Cray Research supercomputing.

### Desktide flexibility

Because the CRAY EL92 system is binary compatible with the world's most powerful supercomputers, it can serve a wide variety of purposes:

- ☐ Provide a low-cost application development and optimization platform for CRAY C90 supercomputers and the CRAY T3D massively parallel system
- ☐ Off-load smaller codes and jobs currently running on large networked Cray Research systems
- ☐ Provide a low-cost, high-performance network node for vector and parallel applications
- ☐ Run pilot simulations of large jobs destined for large Cray Research systems
- ☐ Act as a "network resource broker" using Cray Research's Network Queuing Environment (NQE)

### High performance HIPPI connectivity

The HIPPI interface provides high performance for network connectivity applications such as

Parallel Virtual Machine (PVM) and assists transfers of large datasets to CRAY C90 and CRAY T3D systems. The CRAY EL92 system can be configured with up to two 100 Mbyte/s HIPPI-to-memory channels.

### Cray Research software at the desktide

The CRAY EL92 system includes the same operating system, programming environments, compilers, and networking capabilities as more powerful Cray Research systems. As a result, it provides an ideal, source-compatible application development platform.

The CRAY EL92 system includes UNICOS, a POSIX compliant, standard UNIX System V environment enhanced to provide efficient parallel/vector processing, production quality resource utilization, security, and network connectivity. Based on actual and de facto industry standards, this proven supercomputing environment enhances application development, system interoperability, and user productivity.

To enhance application development and user productivity, users can choose from a powerful set of programming environments that include industry leading optimizing compilers, advanced performance-analysis tools, industry standard visual interfaces, and high-performance scientific and I/O libraries. The CRAY T3D Emulator is also available, which helps programmers using the CF77 Fortran programming environment to develop and test CRAY T3D application codes on the CRAY EL92 system.

To provide sustained gigaflops performance, the CRAY EL92 provides distributed computing capabilities that allow CRAY EL92 systems to be clustered with a CRAY Y-MP, CRAY C90, or CRAY T3D system and applied to a single job using PVM software. The CRAY EL92 system also provides interoperability with heterogeneous computers on a network through adherence to industry standards in its operating system (UNIX System V), languages, (Fortran 77, C, C++), networks (HIPPI, FDDI, Ethernet), protocols (RPC, OSI, TCP/IP), and distributed computing environments (PVM, RQS/NQS, NQE).

### CRAY EL92 configurations

Model	CPUs	Memory Size (Mbytes)	Maximum disk capacity (Gbytes)	HIPPI channels (optional)	Power
100	1	256 (32 Mwords)	6	N/A	100 VAC
200	1	256 (32 Mwords)	20	1	220 VAC
300	1	512 (64 Mwords)	20	1	220 VAC
400	2	512 (64 Mwords)	20	2	220 VAC

## A full range of applications

The CRAY EL92 system runs over 600 supported applications from nearly every scientific and engineering discipline. With parallelization capabilities and real main memory, the CRAY EL92 system can provide scalable application solutions unique in its price range. As problem complexity increases, a CRAY EL92 application can be scaled easily to run on binary compatible CRAY Y-MP and CRAY C90 systems.

## Ease of installation

CRAY EL92 systems can be customer-installed easily in an office environment. The model 100 CRAY EL92 system runs on standard 100-120 VAC power and the 200, 300, and 400 models

run on standard 200 - 240 V power. Both 50 Hz and 60 Hz power are supported to allow installation worldwide.

## Service

A variety of service options for the CRAY EL92 system have been designed to meet your needs for service. You may choose from options ranging from full service through self service, depending on your operational needs. Additional professional services allow you to tailor a customized solution to meet your requirements.

For more information and benchmarking time on a CRAY EL92 system, contact your local Cray Research representative.

### Software highlights

#### UNICOS operating system

- ☐ Standard UNIX, POSIX 1003.1 compliant
- ☐ Batch and interactive processing
- ☐ Efficient parallel processing
- ☐ Multi-level and network security features
- ☐ Flexible file I/O (FFIO)

#### Programming environments

- ☐ Standard portable languages (Fortran 77, C, C++)
- ☐ Industry leading optimizing compilers
- ☐ Advanced performance-analysis tools
- ☐ Industry standard visual interfaces
- ☐ High-performance scientific and I/O libraries

#### Networking and distributed computing

- ☐ HIPPI, FDDI, Ethernet
- ☐ PVM, RQS/NQS, NQE
- ☐ RPC, OSI, TCP/IP

#### Data storage management

- ☐ Data Migration Facility (DMF)
- ☐ Online tape support
- ☐ REELlibrarian

### Hardware specifications

#### CPU

Peak performance 133 MFLOPS per CPU

#### Memory


Technology 70 ns CMOS DRAM  
Memory size 256 - 512 Mbytes (32 - 64 Mwords)  
Total memory bandwidth 1.7 Gbytes/s

#### VME-based IOS

Number of IOSs 1 per system  
HIPPI to memory channels 1 channel pair per processor module @100 Mbytes/s per channel

#### Physical characteristics

Weight 280 to 325 lbs (127 to 147 kg)  
Footprint area 4.3 ft<sup>2</sup> (0.4 m<sup>2</sup>)  
Max. power consumption 3200 W (3.2 kVA)  
Min. power consumption 1200 W (1.2 kVA)  
Operating temperature 50 - 85°F (10 - 35°C)

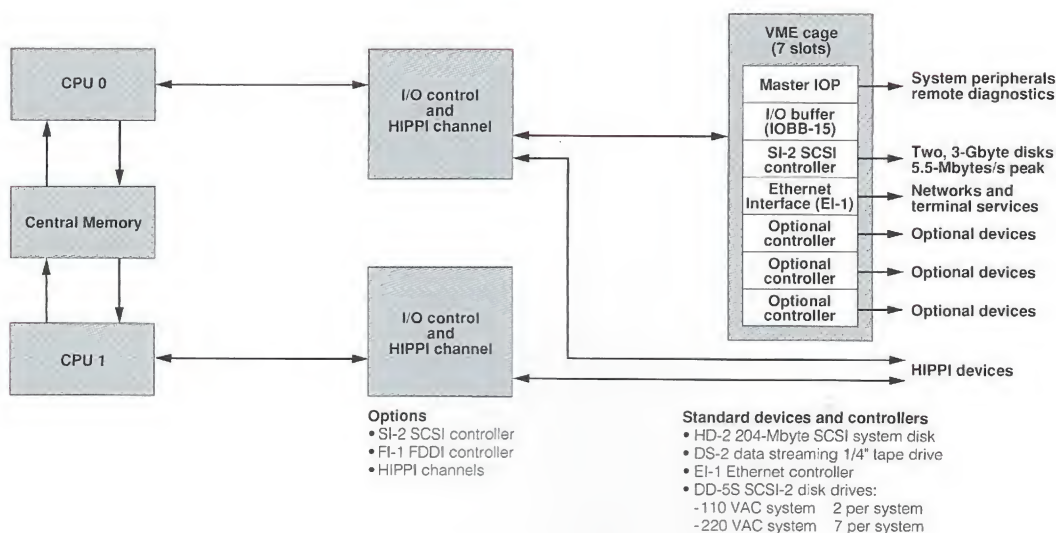

CRAY, CRAY Y-MP, and UNICOS are federally registered trademarks, and CF77, CRAY C90, CRAY EL92, CRAY T3D, and CRAY Y-MP EL are trademarks of Cray Research, Inc. Ethernet is a trademark of Xerox Corporation. PVM is a trademark of the Oak Ridge National Laboratory. UNIX is a trademark of UNIX System Laboratories, Inc.

The product specifications contained in this fact sheet and the availability of the products are subject to change without notice. For the latest information, contact your Cray Research representative.